

## Flowcoat UV



### Standard Colour Chart



The applied colours may differ slightly from the examples shown above. Contact our customer services for a true colour sample or a special colour match.

### Description

A heavy duty, high performance, seamless resin flooring system incorporating epoxy and UV stable polyurethane technology.

### Typical Uses

Flowcoat UV may be used as a hard wearing, protective coloured floor coating in areas such as workshops, factories, warehousing and store rooms where a combination of chemical resistance, durability, UV resistance and abrasion resistance is required.


### Benefits

- Chemical resistant
- Hard wearing
- Smooth or non slip finish
- Abrasion resistant
- 100% UV resistance and stable
- Attractive, light reflectant appearance
- Seamless and hygienic finish
- Very low maintenance

### Project References

Local references available upon request

### System Design

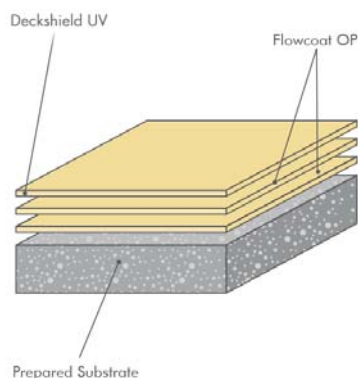

\*Assumes concrete compressive strength is greater than 25 N/mm<sup>2</sup>

## Model Specification

Product: Flowcoat UV

Finish: Gloss

Thickness: Dependant on specification

Colour : \_\_\_\_\_

Preparatory work and application in accordance with manufacturer's instructions.

Manufacturer: Flowcrete Australia Pty Ltd

Telephone: Customer Service - +61 7 3205 7115

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry to 75% RH as per BS8204 and free from rising damp and ground water pressure.

## Products Included in this System

Flowcoat OP

Deckshield UV

For actual coverage rates, refer to the appropriate project specification.

**Detailed application instructions are available upon request.**

## Coving

Coving forms an integral part of the flooring system. It creates a sealed finish between the floor and wall joint. Please refer to Flowtex F1 Coving Mortar for further information.

## Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site at [www.flowcreteaustralia.com.au](http://www.flowcreteaustralia.com.au).

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

## Focus on the Floorzone

Flowcrete Australia Pty Ltd is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing and corrosion protection systems... to name just a few. Our corporate objective is to satisfy your flooring needs.

## Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20 °C and at 50% Relative Humidity.

Fire Resistance	BS476-7: Surface spread of flame: Class 1
Slip Resistance	TRRL Pendulum Slip Test Dry >40 Wet depends on specification

Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry) - please contact our Technical Advisors for further details and specifications.

Thermal Resistance	Tolerant up to 70 °C
Water Permeability	Nil-Karsten test (impermeable)
Surface Hardness	180secs. Koenig Hardness Test
Chemical Resistance	Contact Technical Department
Abrasion Resistance	Taber Abrader: 80 mg loss per 1000 cycles (1 kg load using CS10 wheels)
Compressive Strength	> 60 N/mm <sup>2</sup> (BS6319)
Flexural Strength	> 40 N/mm <sup>2</sup> (BS6319)
Tensile Strength	> 15 N/mm <sup>2</sup> (BS6319)
Bond Strength	Greater than cohesive strength of 25 N/mm <sup>2</sup> concrete. >1.5 MPa.

## Speed of Cure

	10°C	20°C	30°C
Light traffic	48 hrs	24 hrs	18 hrs
Full traffic	72 hrs	48 hrs	36 hrs
Full chemical cure	12 days	7 days	6 days

## Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

## Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

## Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.

Flowcrete Australia Pty Ltd  
Brisbane Office (Regional)  
Unit 2, 41 Deakin Street  
Brendale QLD 4500  
Tel: +61 7 3205 7115  
Fax: +61 7 3205 3116  
Email: [australia@flowcrete.com](mailto:australia@flowcrete.com)  
*Flowcrete Australia is an RPM company*

Sydney Office  
Unit 1/12 Blackmore Road  
Smeaton Grange NSW 2567  
Tel: +61 2 4648 0397  
Fax: +61 2 4648 0719